




USportMA6

INDOOR SOLUTION

- Ultra-light, Ultra-thin.
- Easier Modular Maintenance.
- Specially Designed for Indoor Stadiums.
- Available in 500x500mm or 500x1000mm.

Easier, Modular Maintenance


Module safety ring design: It is easy to install and maintain; Module draft design: It can seamlessly splice radians and realize various shapes.

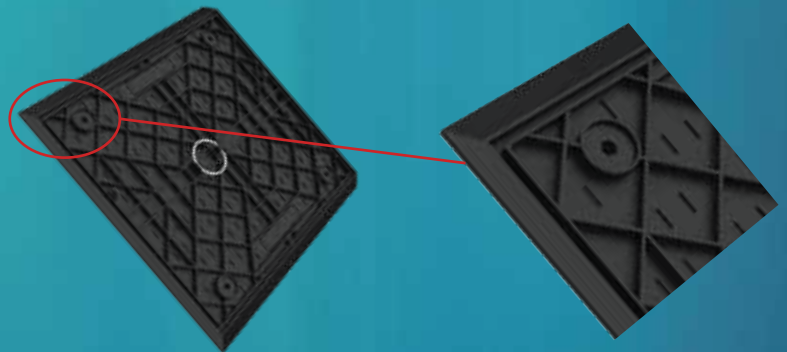

Designed for Indoor Stadiums

In the humid environment, the display products have high protection grade, which can meet the high reliability of display products in sports competitions.



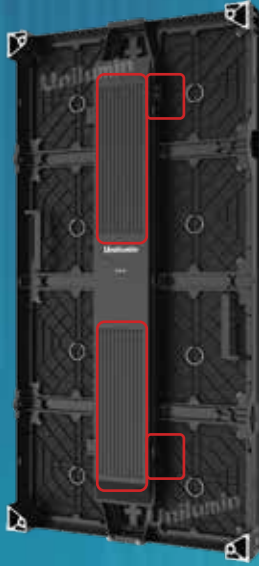

Aviation Connector Design

Designed for fast, convenient and stable connection of power and signal lines.

Heat dissipation slot design of power box are compatible with the traditional fan design and it has no noise and stable system operation

Parameter	Value
Pixel Pitch	6.25mm
LED Type	3-in-1 Black SMD
Brightness	2,000 cd/m ² (nits) calibrated
Pixels Per Panel	80 x 80 pixels
Pixel Density	25,600 pixels/m ²
Weight Per Panel	8 kg (17.6 lbs)
Module Size	W250mm x H250mm / (9.8in x 9.8in)
Cabinet Size	W500mm x H500mm x D85mm / (19.7in x 19.7in x 3.3in) W500mm x H1000mm x D85mm / (19.7in x 39.4in x 3.3in)
Aspect Ratio	1:1
Material	Die-casting Aluminum
Ingress Protection	IP43
Operating Temperature/Humidity	-20°~ +45° / 10~90%RH
Storage Temperature/Humidity	-30°~ +60° / 10~90%RH
Maintenance	Front or Rear
Horizontal / Vertical Viewing Angle	140° / 110°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	5000:1
Input Power (Max/Typical)	280W/94W per panel
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.