



## USportMC6

INDOOR SOLUTION

- Stability and Protection.
- Specially Designed for Indoor Stadium Fences.
- Multiple Installation Methods.

### Stability and Protection

---

USportMC meets all FIBA requirements, and with its collapsible bracket ensures the stability of the box during use as well as save on storage space. With a soft rubber protective cover and silicone mask design, this product protects players from being injured and screens from getting damaged if there is impact from a game.



### Designed for Indoor Stadiums

---

In the humid environment, the display products have high protection grade, which can meet the high reliability of display products in sports competitions.



### Contact Us

844.263.3675 | [www.unilumin-usa.com](http://www.unilumin-usa.com)


Find Us @UniluminUSA



## Multiple Installation Methods



**Seat Mounting**  
Fence Screen

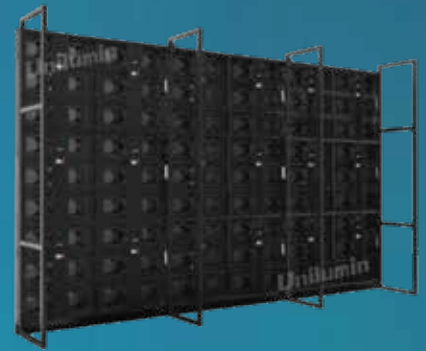

**Stack Mounting**  
Large Screen at Both Sides

Parameter	Value
Pixel Pitch	6.25mm
LED Type	3-in-1 Black SMD
Brightness	2,000 cd/m <sup>2</sup> (nits) calibrated
Pixels Per Panel	256 x 144 pixels
Pixel Density	25,600 pixels/m <sup>2</sup>
Weight Per Panel	56 kg (123.5 lbs)
Module Size	W400mm x H300mm / (15.7in x 11.8in)
Cabinet Size	W1600mm x H900mm x D105mm / (63in x 35.4in x 4.1in)
Aspect Ratio	16:9
Material	Die-casting Aluminum
Ingress Protection	IP43
Operating Temperature/Humidity	-20°~ +45° / 10~90%RH
Storage Temperature/Humidity	-30°~ +60° / 10~90%RH
Maintenance	Rear
Horizontal / Vertical Viewing Angle	140° / 110°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	5000:1
Input Power (Max/Typical)	260W/87W per panel
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.