



USportMC8

INDOOR SOLUTION

- Stability and Protection.
- Specially Designed for Indoor Stadium Fences.
- Multiple Installation Methods.

Stability and Protection

USportMC meets all FIBA requirements, and with its collapsible bracket ensures the stability of the box during use as well as save on storage space. With a soft rubber protective cover and silicone mask design, this product protects players from being injured and screens from getting damaged if there is impact from a game.



Designed for Indoor Stadiums

In the humid environment, the display products have high protection grade, which can meet the high reliability of display products in sports competitions.



Contact Us

844.263.3675 | www.unilumin-usa.com


Find Us @UniluminUSA



Multiple Installation Methods



Seat Mounting
Fence Screen

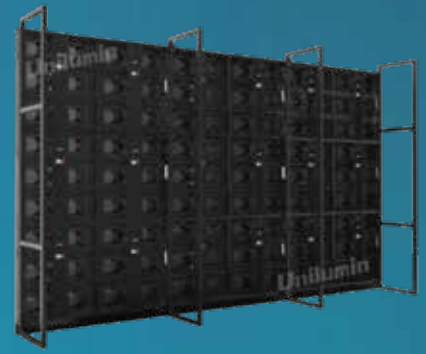

Stack Mounting
Large Screen at Both Sides

Parameter	Value
Pixel Pitch	8.33mm
LED Type	3-in-1 Black SMD
Brightness	2,000 cd/m ² (nits) calibrated
Pixels Per Panel	192 x 108 pixels
Pixel Density	14,400 pixels/m ²
Weight Per Panel	56 kg (123.5 lbs)
Module Size	W400mm x H300mm / (15.7in x 11.8in)
Cabinet Size	W1600mm x H900mm x D105mm / (63in x 35.4in x 4.1in)
Aspect Ratio	16:9
Material	Die-casting Aluminum
Ingress Protection	IP43
Operating Temperature/Humidity	-20°~ +45° / 10~90%RH
Storage Temperature/Humidity	-30°~ +60° / 10~90%RH
Maintenance	Rear
Horizontal / Vertical Viewing Angle	140° / 110°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	5000:1
Input Power (Max/Typical)	260W/87W per panel
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.