



USportSC16

OUTDOOR SOLUTION

- Standard Mounting Bracket.
- Specially Designed for Outdoor Stadium Ring Stand.
- Ultra-Light & Ultra-Thin.
- Suited for Outdoor Use.

Standard Mounting Bracket


Save the conventional steel structure, which is convenient for construction and improves efficiency. Different sizes of mounting bracket can be customized.



Suited for Outdoors

Fast, convenient and stable connection of power and signal lines. Fan free design: no noise, stable system operation. Suitable for 24/7 outdoor use.

Ultra-Light & Ultra-Thin

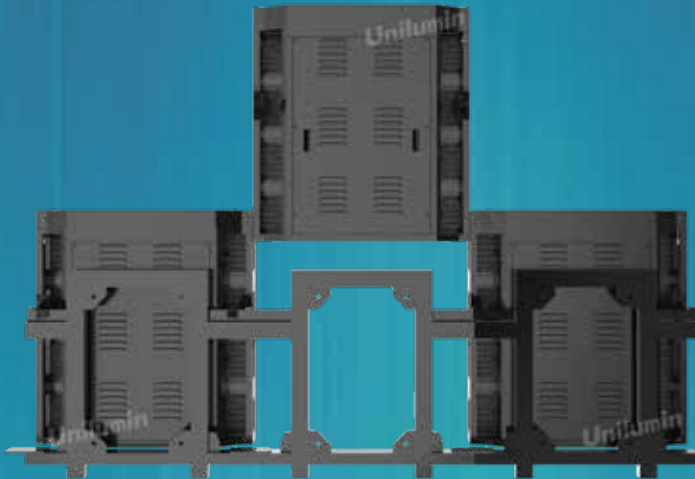

Multiple Dimensions:

- 400 mm x 800 mm, 26 kg of the case weight
- 800 mm x 800 mm, 13 kg of the case weight
- Convenient installation, which saves labor costs

Parameter	Value
Pixel Pitch	16.6mm
LED Type	3-in-1 Black SMD
Brightness	5,500 cd/m ² (nits) calibrated
Pixels Per Panel	24 x 48 pixels
Pixel Density	3,600 pixels/m ²
Weight Per Panel	13 kg (28.7 lbs)
Module Size	W400mm x H200mm / (15.7in x 7.9in)
Cabinet Size	W1600mm x H800mm x D157mm / (63in x 31.5in x 6.2in)
Aspect Ratio	1:2
Material	Die-casting Aluminum
Ingress Protection	IP65
Operating Temperature/Humidity	-20°~ +50° / 10~90%RH
Storage Temperature/Humidity	-30°~ +60° / 10~90%RH
Maintenance	Front
Horizontal / Vertical Viewing Angle	140° / 110°
Color Temperature	2000-9300K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	5500:1
Input Power (Max/Typical)	730W/244W per panel
Video Frame Rate	50/60 Hz
Refresh Rate	3840 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Input Signal	DVI/HDMI/VGA/SDI/DP/AV
Certification	TUV-CE/UL/CB/FC C/IC/RoHs

Specifications are for reference only and are subject to change without notice.